

Montageanleitung / Installation instructions Power supply AC 1212

Deutsch

Betriebslage

DIN Tragschiene TS 35 (7,5) horizontal befestigen, Gerät aufsnappen; Beschriftung muss lesbar sein. Für andere Einbaulagen bitte Rücksprache halten.

Sicherung

Das Netzteil ist elektronisch gegen externe Kurzschlüsse abgesichert. Die interne Schmelzsicherung trennt bei einem Defekt das Netzteil vom Netz. Sie ist nicht zugänglich, da vor einem Austausch das Netzteil aus Sicherheitsgründen beim Hersteller untersucht werden soll.

ACHTUNG


Gerät nie ohne Erdung betreiben! Nicht öffnen, wenn Gerät unter Spannung steht - **LEBENSGEFAHR!**
Nach dem Öffnen interne Schutzleiterverbindung wiederherstellen! Lüftungsöffnungen freihalten!

Abmessungen und Anschlußbelegung

Geschlossenes Aluminiumgehäuse; Maße in mm
Der Schirmanschluss soll mit der Maschinenmasse oder mit dem Schirm des Verbrauchers verbunden werden.
Anschlussklemmen: max. 4 mm² (starrer Draht) max. 2,5 mm² (Litze) Draht min. 9mm, max. 15mm abisolieren.

Hinweis: Keine Gehäuseschrauben ohne Rücksprache entfernen, da interne Schutzleiterverbindungen gelöst werden könnten!

Technische Änderungen behalten wir uns ohne Ankündigung vor.

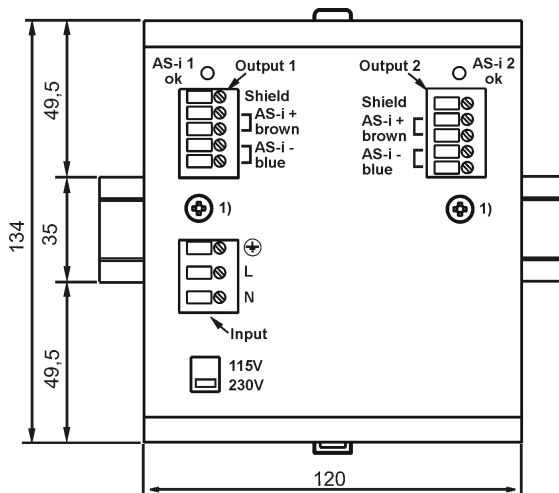

1) Die PE-Schraube steht max. 3,5mm heraus und darf von außen nicht gelöst werden!

1) The PE screw protrudes up to max. 3.5mm and must not be unscrewed from outside!

English

Mounting position

Mount DIN rail TS 35 (7.5) horizontally, snap on the unit. The inscription must be legible. Please contact manufacturer for other mounting positions.

Fuse

The power supply is electronically protected against short-circuits. The internal fuse isolates the power supply in case of a failure. For safety reasons the fuse is not accessible. The unit should be checked by the manufacturer if fuse blows.

CAUTION

Never operate the unit without ground connection! Do not open when the unit is live - **danger to life!** After opening the unit restore the internal PE connection! Keep the ventilation holes free!

Dimensions and connections

Closed aluminium housing; dimensions in mm
Connect the screen to the earth of the machine or to the screen connection of the consumer.
Connection terminals: max. 4 mm² (rigid wire) max. 2.5 mm² (flexible wires) Strip the isolation of the wire (min. 9mm, max. 15mm).

Note: The housing screws should not be removed without contacting the manufacturer because internal PE connections could be interrupted!
Technical data may change without notice.

